


## 4 吋智能終端

### LCD Switch Panel

#### P-D-CTP4

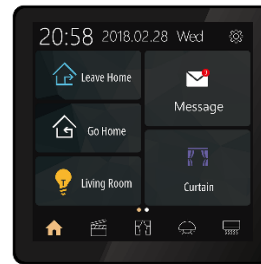

4 吋智能終端是一款高清液晶觸控終端，能夠代替燈控、窗簾觸控面板及空調面板，從而實現集中控制，同時支援情境模式控制，能夠讓使用者得到更佳智慧體驗。

With the LCD Switch Panel which has a HD touch LCD screen, you can replace the light control, curtain touch panel and air conditioning control panel and achieve the centralized control system. Meanwhile, it supports scene mode control which enable users to have better intelligent experience.


#### 性能特點/ Features

- 情境模式：可配置多個情境模式，使用者可自訂
- 照明控制：可控制觸控開關也可控制多路開關執行器
- 調光控制/調色控制
- 空調控制：可實現多連線及風機盤管控制
- 窗簾控制：實現單軌或雙軌控制
- 1 路本地繼電器
- 螢幕保護裝置功能，可實現 30 秒、1 分鐘、5 分鐘、常亮設置
- 螢幕亮度可實現 0-100%調整
- 蜂鳴器音量可實現 0-100%調整
- 消息查看
- 遠端升級
- 設備資訊查看 ( AID、SN、DK、密碼、版本 )
- 4 吋觸控液晶(53 組控制)，具網路載波雙通道通訊功能，可遠端桌面及 APP 同步控制\_PLT4(實際數量依現場需求)
- Scene mode: Multiple scene modes can be configured, and users can customize it.
- Lighting control: The lighting control can control the touch switch or the multi-way switch actuator.
- Dimming control/Toning control
- Air conditioning control: Multi-connection and fan coil control can be realized.
- Curtain control: Realize single track or double track control.
- 1 local relay
- The screen saver function can achieve 30 seconds, 1 minute, 5 minutes, and constant light settings.
- The screen brightness can be adjusted from 0-100%.
- The buzzer volume can be adjusted from 0-100%.
- Message review
- Remote upgrade
- View device information (AID, SN, DK, password, version number)

#### 技術參數/ Specifications

- 工作電壓：100-240V~
- 工作頻率：50/60Hz
- 待機功耗：小於 4W
- 通訊方式：電力線載波
- 工作溫度：0°C~40°C
- 工作濕度：10%RH~85%RH
- 開關負載：5A/路
- 外型尺寸(L\*W\*H)：86\*86\*39.2mm
- Operating voltage: AC 100V~240V
- Operation frequency: 50/60Hz
- Standby mode power consumption: less than 4W
- Communication: power line communication (PLC)
- Ambient temperature: 0°C~40°C
- Ambient humidity: 10%RH~85%RH
- Switch load: 5A/channel
- Dimensions(L\*W\*H): 86\*86\*39.2mm

接線圖/ Wiring Diagram

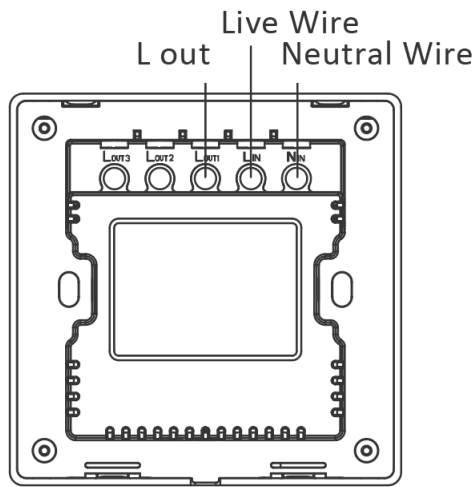

訂貨型號/ Order Model

P-D-CTP4-B-CT  
P-D-CTP4-W-ST  
P-D-CTP4-B-BT